



EVEREST

BOONDX

BOONDX

Bonding layer, used to treat smooth surfaces of concrete, for indoor and outdoor use.

CHARACTERISTICS

- BOONDX resin-base, liquid material used for the treatment of smooth concrete surfaces.
- It ensures a good bonding of concrete with the filling layers, such as: mortar, grout, stucco, waterproof, etc.
- The use of this material eliminates the need to use cement sprays in smooth concrete surfaces.
- The treatment of the surfaces with BOONDX ensures an excellent workability and notable facility in the application of the other coats.
- It is a ready for use product.
- Uniforms the absorbing rate of the surface where it will be applied.

SUPPORT PREPARATION


The support where BOONDX will be applied should be dry and clean free of dust, petroleum, wax and varnishes residues, or anti-adhesion materials. The cleaning of the support is done manually or mechanically.

PRODUCT PREPARATION

The product must be stirred manually in a bucket, and after that it is ready to be used. If necessary, the product can be diluted with water up to 10%.

RECOMMENDATIONS FOR USE

It used to treat smooth concrete surfaces which later will be filled with filling mortar, grout, etc. It is used as insulation, fixer for surfaces which later on will be painted or coated with other layers, such as: mortar, grout, etc.

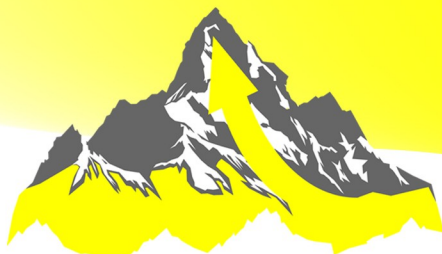

EVEREST

BOONDX

SURFACE FINISH

Property	Value
Form	Liquid
Colour	Red brown
Combustibility	Incombustible
Application temperature	+5°C up to +35°C
Density	1.57 ± 0.05 gr/ml

PRODUCT PROPERTIES

- It reduces water-absorbing ability of the support.
- Neutralizes the pH value.
- No solvents in its composition

APPLICATION OF PRODUCT

The product is applied with a brush or roller, thus creating a uniform opening in the entire surface. You should wait for at least 12 hours for BOONDX to get dried, depending on the temperatures, before applying the following product on the surface. Low temperatures and moisture presence significantly increase the drying time. You should not apply it when the temperature of the support is lower than 5°C, and make sure to not water the support for the next 24 hours after application.

CONSUMPTION

0,35 - 0,4 Kg/m²

Storage and Packaging

- **Shelf Life:** 12 months if stored in a dry place away from heat sources.
- **Storage Temperature:** Between +5°C and +30°C. Protect from frost.
- **Packaging:** Available in **5 kg / 20 kg** buckets.

HEALTH AND SAFETY INFORMATION

Keep out of reach of children. In case of contact with the eyes or swallowing, please seek medical advice immediately and show the contents of the container. Do not dispose the product into drains.